

Data sheet Receiver Bus-3

Bus-3




Compact receiver for various applications

- Voltage: in the AC and DC range according to customer requirement
- Compact and robust housing design
- Protection class IP 65
- CE
- Individually adapted solution according to specifications

Technical data

Power Supply	8–35 V/DC or 40–250 V/AC
Max. switching current	4 A
Outputs	digital / analog variable by modular design (plug-in cards)
Inputs	digital / analog variable by modular design (plug-in cards)
Emergency stop relay	forcibly actuated
Antenna	integrated or external
Weight	3,000 g

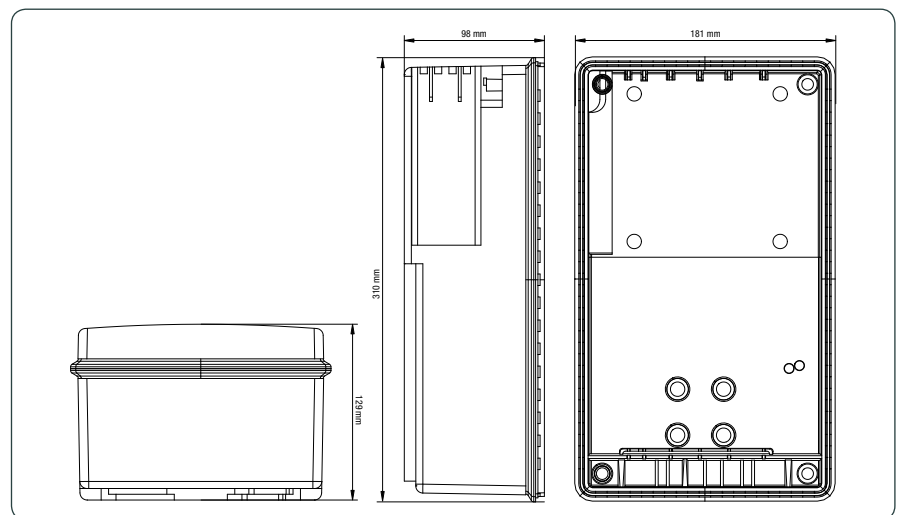

Options

- Interface: RS232